



Manufacturer's Installation Instructions

Customised to your floor plan

- 1) Review a copy of your floor plan supplied with the FALLBREAKER and note the starting point marked with a highlighter. Locate the corresponding point on your FALLBREAKER and place the product on this corner.
- 2) Then, unfold as per the arrows on your floor plan until the marks on the FALLBREAKER line up with the exterior frame and the product overlaps by 300mm.
- 3) Stretch out the FALLBREAKER over the top plates stapling as you go.
- 4) Place the truss packers on top of the FALLBREAKER nailing off at 300mm centres.
- 5) **Create a 65mm hole in the centre of each room to allow for drainage of rain water. Melt holes using a map gas burner OR run a hole saw through the FALLBREAKER in reverse.**
- 6) Fill bags supplied with sand and place near the drainage holes. Do not allow holes to become blocked.

** Do not install in windy conditions



Non-customised – ie buying a piece off the roll


Cut your required length of FALLBREAKER allowing for a 300mm overlap on the perimeter. Where pieces will be overlapping on the top plates please ensure that you allow for a 500mm overlap. Continue as above from numbers 3 – 6.

Removing your FALLBREAKER

Tape your cutting knife to a pole and walk around the inside of your rooms to cut out your FALLBREAKER. The product must be removed prior to ceilings being installed.

Safety Notes

Your HUMPTY'S FALLBREAKER has been tested and certified:

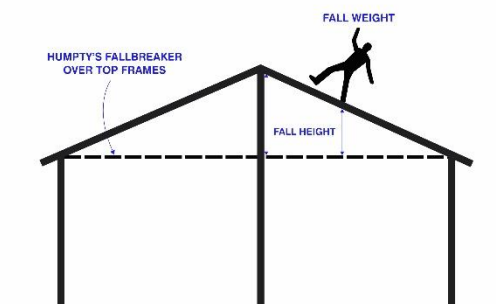

FALL WEIGHT (kg)	100	120	140	165
FALL HEIGHT (m)	3.1	2.4	1.9	1.5

Please Note:

- ◆ Each customised FALLBREAKER comes with its own serial number.
- ◆ A tag is attached at the starting point and **must be left in place at all times.**
- ◆ Product should be used within 6 months of receiving and stored under cover at all times prior to installation.
- ◆ After installation, the product should not be exposed to the weather for longer than 3 months.
- ◆ Inspect your FALLBREAKER daily after installation to ensure that no drain holes are blocked and the surface is clear of debris and undamaged.
- ◆ Do not use the FALLBREAKER as a work surface; please avoiding walking across it between frames.
- ◆ The product is designed for a single use only and should be disposed of thereafter.

Disclaimer:

This product is a fall arrest solution and must be installed as per the manufacturer's instructions. The manufacturer will not accept any responsibility for incidents that result from incorrect installation or treatment of this product in uses that it is not designed for.